



LC-XIP2000

Projectors... and more!

Ultrawide Interactive XGA LCD Projector


KEY FEATURES: Model LC-XIP2000

Interactive Presenter Features

Interactive function permits real-time annotation of projected image.
Pen & pointer function as both writing instruments & computer mouse.
Included software for advanced functionality, including screen capture.

Ultrawide Projector Features

Extremely Short Throw Lens: as close as a 1 : 1 Throw-to-Width Ratio
2000 ANSI Lumens, 85% uniformity, and 400:1 contrast ratio.
Weighs less than 8 lbs! Compact, low-profile design!
3 panel LCD imaging delivers a rich, color saturated picture.
XGA resolution. SXGA - VGA compatible.
Smart data compression / expansion, and video scaling.
Two HD15 computer inputs, plus one HD15 computer monitor output.
Preset image offset. Automatic vertical digital keystone correction.
Auto Ceiling adjustment. Auto Brightness adjustment.
Accepts Composite, S, and Component Video in all major standards.
Displays both 4:3 and 16:9 formats. Supports most HDTV resolutions.
Wireless remote control w/Laser. 4X digital zoom. Auto input search
3 Year* Projector Warranty!

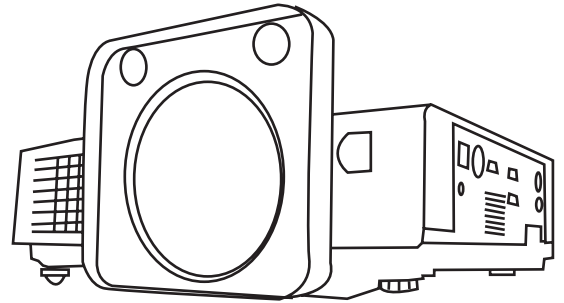

LC-XIP2000

Included Accessories: Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord. Computer Input Cable (HD15 - HD15). S-Video Input Cable (S-Video-S-Video) Composite Video Input Cable (RCA-RCA) Audio Input Cable (2RCA ~ Mini Stereo) USB Mouse Cable (USB-A ~ USB-B) Wireless Remote Control w/ Laser Pointer & Batteries (AAA x 2).

Optional Accessories: Replacement Lamp. Carry Bag. Component Video Input Cable (HD15-3-RCA). RS-232C Input Cable (DB9-Mini DIN-8). 15' (5M) USB Extension Cable and AC Adapter, Ceiling Mount. Ceiling Post and Plate.

SPECIFICATIONS: Model LC-XIP2000

Brightness	up to 2000 ANSI Lumens	Formats Supported	Normal 4:3 and Wide Screen 16:9
Illumination Uniformity	85%	Video: Image Sizing	Video Scaling Technology
Size of Color Palette	16.7 Million	Signal Inputs	
Contrast Ratio	400:1 (Full ON/OFF)	Computer 1	HD15 x 1
Projection Lamp	205 Watt NSH	Computer 2 / Component Video (w/optional adapter):	HD15 x 1
Estimated Lamp Life	up to 2000 Hours of Use	S-Video	S-Video x 1
Imaging System	0.63" PolySilicon active matrix TFT Panels x 3	Composite Video	RCA x 1
Screen Pixels	1024 x 768 in stripe configuration	Audio:	MiniStereo x 1
Total Pixels	2,359,296 ((1024 x 768) x 3)	Outputs	
Lens Type	Manual Zoom and Focus	Computer Monitor:	HD15 x 1
Lens Specs	Speed: f:1.6-1.88; FL: 0.51-0.61 in. (13.0-15.62 mm)	Audio (Stereo) - Line:	MiniStereo x 1
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.0-1.2:1	Sound System - Amplifier	2 Watts (Mono)
Image Diagonal: Normal Projection	40-300 in. (101.6-762 cm)	Sound System - Speaker:	1.6 x 1.2 in. (4x3 cm) x 1(Ellipse)
Image Width: Normal Projection	2.7-20 ft. (0.81-6.1 m)	Fan Noise	as low as 41 dBA
Throw Distance (tele ~ wide)	2.6-19.8 ft. (0.79-6.04 m.)	Cabinet Size (HxWxD)	3.8 x 12.3 x 10.6 in. (96 x 310 x 270 mm.)
Front Elevation / Maximum Pitch	up to 14° Up / up to 14° Up or Down	Including lens and feet	5.3 x 12.3 x 13.2 in. (135 x 311 x 334 mm.)
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 6.5:1	Weight	7.7 lb (3.5 kg)
Vertical Keystone Correction	Digital: up to 30° up or down	Packaged Size (HxWxD)	9.9 x 17.7 x 13.8 in (250 x 450 x 350 mm)
Scanning Frequency	Auto: H Sync. 15-69kHz; V Sync. 43-85Hz	Packaged Weight	13.7 lb (6.2 kg)
Dot Clock	110 MHz	Power Requirements	100-240V AC, 50/60Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	Up to 250 Watts
Remote Projector Control	Wireless (Infra Red) x 1	Heat	up to 853 BTU (215 KC)
RS-232C Control Port	Mini DIN 8 Pin x 1	Power Cord	6' (1.8M) Type 3, Detachable
Computer Native Resolution	1024 x 768 (XGA)	Safety Compliance	UL, cUL, IEC
Computer: Compatibility	SXGA, XGA, SVGA, VGA	Security Facilities	Kensington® Security Slot
Computer: Formats	1280x1024 through 640x480	Operating Temperature	41-95°F (5-35°C)
Computer: Higher Resolutions	Displayed panned or Smart Compressed	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Lower Resolutions	Displayed normal or Smart Expanded	Warranty: (to the original end-use customer)	
Video Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Projector: 3 Years / 6000 Hour Use*(Parts & Labor to Correct Defects)	
Video HD Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i	Lamp	90 Days (Failed Lamp Replaced Pro-Rata

* Whichever occurs first

Interactive Presenter: Minimum System Requirements	
Computer:	PC only (Interactive Presenter not available for MAC)
OS:	Win 2K SP4 or Win XP SP2+ and Direct X 9.0
CPU:	Intel Pentium IV
RAM:	256 Mb
Available HD capacity:	30 MB
Other:	CD-ROM drive, USB-B ver: 2.0

Interactive Presenter: Specifications	
Included Accessories:	Bag including Pointer, Pen, AA Batteries x 4
Optional Accessories:	15' (5M) USB Extension Cable and AC Adapter
Interactive Presenter: Operating Range	
Image Diagonal: Interactive Projection	50-150 in. (127-381 cm)
Image Width: Interactive Projection	3.3-10 ft. (1.02-3.1 m)
Interactive Throw Distance (tele ~ wide)	2.6-19.8 ft. (0.8-6.0m.)

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws. Caution! Laser Radiation (remote) - Do not stare into beam. Max. Output: 0.9 mW. Wave Length: 645-660 nm. Class II Laser.

Specifications subject to change without notice. ©2007 Eiki International, Inc. Issued June 19, 2007.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>