

# AVerVision CP130 *Portable Document Camera*

## New slick design quickens teaching & learning!

- **Innovative shuttle wheel with clear LED indicator**
- **Enhanced flexibility yet reduced storage size**
- **“Auto Image” to optimize image quality quickly**
- **Clever continuous capture function**
- **Practical feature sets: Networking, Annotation and Recording**



## Product Specifications & Features

### Image / Video

Image Sensor	1/2" CMOS
Total Pixels	850K Pixels
Output Resolution	XGA (1024 x 768)
Lens	f1= 9.6mm
Zoom	8X Digital Zoom
Frame Rate	12fps (Max.)
Focus	Manual
Shooting Area	A4 Landscape

### Functions

Image Rotation	Camera Head 0°/ 90°/-90°
Image Storage	Built-in Memory (Max: 40)
On-Screen Display (OSD)	Provided
Image Effect	Color/ B/W/ Negative/ Mirror/ Reverse/ Freeze
Image Adjust. (White Balance/ Exposure/Night View)	Auto/ Manual
AVerPresenter	Not Provided
Split Screen	Not Provided
Picture-in-Picture	Not Provided
Display Mode	Text/ Graphics
Capture Mode	Single/Continuous
Profile	Not Provided
Timer	Provided
Flicker Filter Control	2 Levels
Remote Control	Not Provided

### Connectivity

DVI-I Output	Not Provided
RGB Input / Output	Provided (15-Pins D-sub, Pass Through)
S-Video, Composite Video Output	Provided (NTSC or PAL)
RS-232 Port	Not Provided
USB 2.0 Port	Provided (PC Camera/ Built-in Image Download)

### Lighting

Light Source	Embedded LED Lamp
Laser Positioning Guide	Not Provided

### Others

Dimension	Operating: 160mm x 170mm x 450mm Folded: 287.4mm x 232.5mm x 61mm
Net Weight	2.4kg (5.31lbs)
Power Source	AC/DC 100-240V ~ 4A, 50/60 Hz
Warranty	3 Year Limited Parts and Labor *1
Certifications	FCC, CE

### Compatible Operating System

Windows®	2000 (SP4), XP (SP2), Vista (32-bit or 64-bit)
Macintosh®	OS 10.3 (Panther), OS 10.4 (Tiger), OS 10.5 (Leopard)

### Convenient Shuttle Wheel



### Smart LED Indicator



### Quick Auto Image



\*1 Please refer to user manual

**AVerVision Software**

AVerMedia's new AVerVision software offers brand new UI with the ability to do networking, add annotations to document camera content, and capture still images, record video clips with audio in multiple formats.

**Minimum System Requirement**

**For PC**

- Intel® Pentium® IV or AMD Athlon® XP or higher processor
- 3 GHz Pentium IV or Intel core 2 duo or better (recommended)
- Windows 2000 Professional (SP4), Windows XP Professional (SP2) or Home, Vista (32-bit or 64-bit)

**For MAC**

- 1 GHz G4 processor or 1.83 GHz Intel core 2 duo or better
- Mac OS 10.3.(Panther), or 10.4.(Tiger), or 10.5 (Leopard)


**Memory:** 512 MB (1GB recommended for Vista and Leopard)

**Hard Disk:** 60MB of available hard-disk space

**LAN connection for Networking function:** RJ-45 100T, or 802.11b WLAN (802.11g recommended)

**AVerVision Features**

- Image Enhance Mode
- Networking
- Annotation
- Video and Audio recording
- Still image capture (Single/Continuous)
- Support TWAIN
- Control Document Cameras features from control panel
- Printer

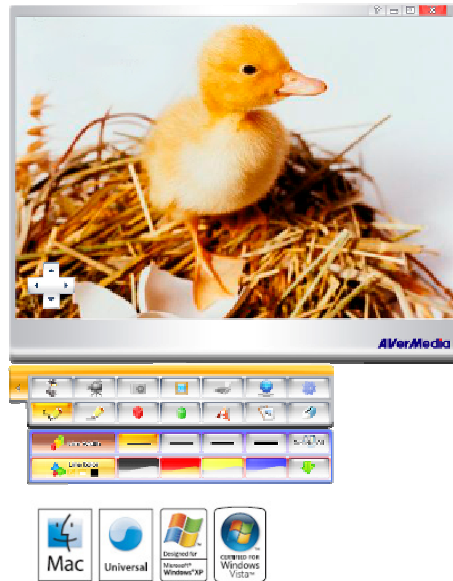

**Package Content**

**Standard**

- AVerVision CP130
- Power Adapter & Cord
- VGA Cable
- S-Video Cable
- USB Cable
- RCA Cable
- User Manual
- AVerVision Software CD
- Anti-Glare Sheet
- Warranty Card

**Optional Accessory**

- Microscope Adapter
- Light Box
- Carrying Bag



Global Home Page: [www.avermedia.com](http://www.avermedia.com), [www.avervision.com](http://www.avervision.com)  
 International / Taiwan: (Tel) 886-2-2226-3630 (Fax) 886-2-2226-8751  
 USA: (Tel) 1-408-263-3828 (Fax) 1-408-263-8132  
 U.K.: (Tel) 44-870-224-7116 (Fax) 44-44-870-224-7124  
 Germany: (Tel) 49 (6074) 40740-0 (Fax) 49 (6074)40740-37  
 France: (Tel) 01 60 05 75 16 (Fax) 01 60 05 78 42  
 Spain: (Tel) 34-91-804- 6035 (Fax) 34-91-803-7629  
 Thailand: (Tel) 66-2-9429262 (Fax) 66-2-9429266  
 China: (Tel) 86-21-52987988 (Fax) 86-21-52987970